


Gear Pump L-G Type
 齿轮泵 L-G 型 组 2(Gr.2), 系列 M



Lamborghini
 OLEODINAMICA

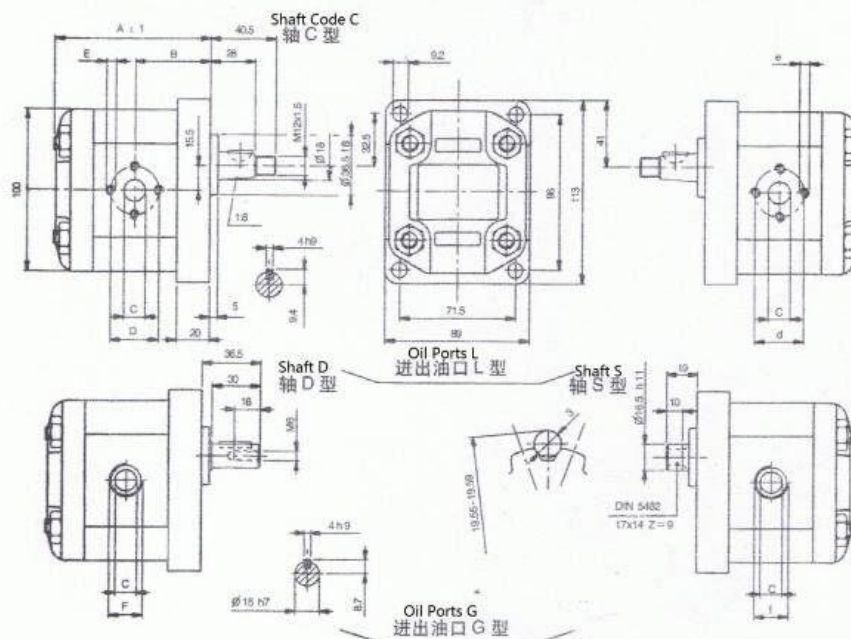

- 排量 240 型目前只有 C 或 D 型轴。
- 根据需要, 可提供其它形式的螺纹。


 P  U	D. (°) S. (°)	轴 Shaft	排 量 cc/rev	最大压力 bar			最 高 转 速 rpm	A	B	C	D	E	c	d	e	F BSP	f BSP	重 量 Kg
				P1 连续	P2 间歇	P3 峰值												
ML P D/L S/G	205	C	4.5				3500	93	44.5									2.3
ML P D/L S/G	206	C	6															
ML P D/L U S/G	207	C	7.6	230	270	300		98	48				13.5	30	M6	1/2"	2.4	
ML P D/L U S/G	208	C	8.5							13.5	30	M6				1/2"		
ML P D/L U S/G	211	C	11				3000											
ML P D/L U S/G	214	C	14.5	220	260	280												
ML P D/L U S/G	217	C	17	210	250	270		120	58								3/4"	2.8
ML P D/L U S/G	220	C	19.5	190	220	250							20	40	M8			
ML P D/L U S/G	226	C	26	160	170	200	3000	133	64.3								1"	3.1
ML P D/L U S/G	240	C●	40.5	140	160	180		159	77.5	20	40	M8				3/4"	3/4"	3.6

公司保留未经声明, 对规格做出变更的权利。




Lamborghini
OLEODINAMICA

齿轮泵 L-G 型 组 3(Gr.3), 系列 M

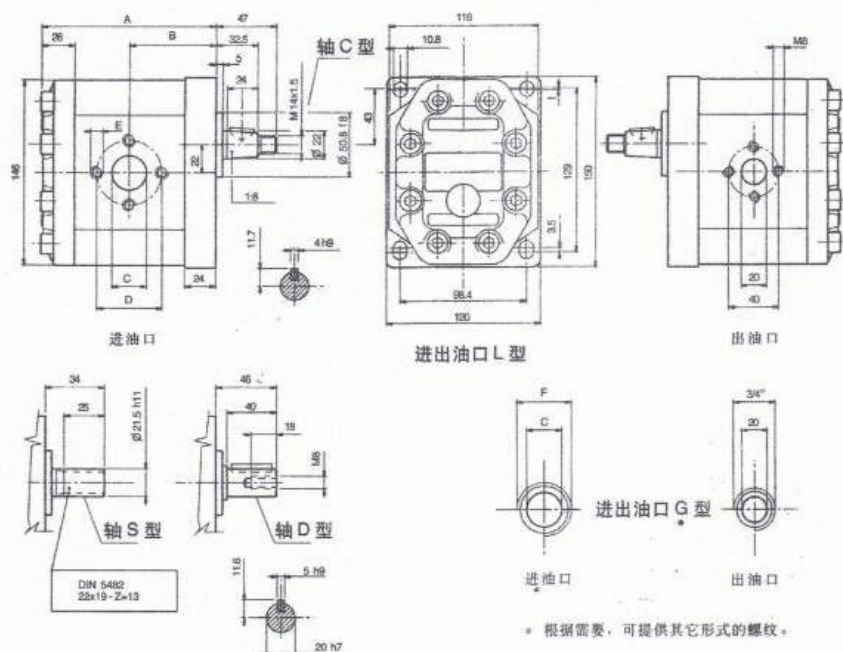

* 根据需要, 可提供其它形式的螺纹。

			排量	最大压力 bar			A	B	C	D	E	F BSP	重量 Kg	
			P1 连续	P2 间歇	P3 峰值									
ML P D / L U S / G	322	C	21.6	210	250	310	137	67.5	20	40	M8	3/4"	6.2	
ML P D / L U S / G	326	C	25.9			280								
ML P D / L U S / G	331	C	30.2											
ML P D / L U S / G	336	C	36											
ML P D / L U S / G	341	C	41.8	180	210	270	151	74.5	27	51	M10	1"	7.2	
ML P D / L U S / G	347	C	46.1											
ML P D / L U S / G	351	C	50.4											
ML P D / L U S / G	361	C	61											
ML P D / L U S / G	373	D	72	140	150	180	166	82	27-34	51-62	M10	1" -1 1/4"	8	
ML P D / L U S / G	390	D	87.8	110	120	170	177	87.5	27-34	51-62	M10	1" -1 1/4"	8.6	

公司保留未经声明, 对规格做出变更的权利。

HYDRAULICS 2003-GPMD